

XJ9512 DRILLING OR MILLING MACHINE



Feature:

milling,driling,boring,reaming
Head swivels $\pm 45^\circ$ of perpendicular
Spindle micro feed
Positive spindle lock
Adjustable gibs on table
Accurate position,strong rigidity,strong cutting power

10.Max.distance spindle to table	220mm
11.Spindle taper	MT3
12.Spindle speed	50-2500RPM
13.Net weight/gross weight	62/80kg
14.Packing size	640X565X760mm
6. Cross travel	100/130mm
7. Spindle rotary angle	-45°~ +45°
8. Working table size	410/460x112m
9. Motor power	550W



XJ9512 DRILLING OR MILLING MACHINE Feature:

milling,driling,boring,reaming
Head swivels $\pm 45^\circ$ of perpendicular
Spindle micro feed
Positive spindle lock
Adjustable gibs on table
Accurate position,strong rigidity,strong cutting power

13.Net weight/gross weight	138kg
14.Packing size	720X570X1020mm
3. Max.end mill capacity	16mm
4. Spindle stroke	350mm
5. Logitudinal travel	350mm
6. Cross travel	200mm
7. Spindle rotary angle	$-45^\circ \sim +45^\circ$
8. Working table size	600x180m
9. Motor power	1000W
10.Max.distance spindle to table	300mm
11.Spindle taper	MT3
12.Spindle speed	50-3000RPM



XJ9525 DRILLING & MILLING MACHINE

Feature:

- Milling, drilling, tapping, boring, reaming
- Head swivels $\pm 90^\circ$ of perpendicular
- Spindle micro feed
- Digital display for spindle sleeve travel
- Positive spindle lock
- Adjustable gibs on table
- Accurate position, strong rigidity, great cutting power

Max.Drilling capacity	25mm
Max.Face mill capacity	80mm
Max.End mill capacity	20mm
Spindle stroke	50mm
Longitudinal travel	550mm
Cross travel	200mm
Spindle rotary angle	-90°~ +90°
Working table size	800x180mm
Motor power	1200W
Max.distance spindle to table	400mm
Spindle taper	MT3
Spindle speed	50-3000RPM
Net weight /Cross weight	145Kg/185Kg
Packing size	920x600x1000mm



XJ9525 DRILLING —MILLING MACHINE

Features

Variable speed

Great-power DC motor

Imported speed control unit

Power feed with speed/distance readout (optional)

Max.Drilling capacity	25mm
Max.Face mill capacity	80mm
Max.End mill capacity	20mm
Spindle stroke	50mm
Longitudinal travel	550mm
Cross travel	200mm
Spindle rotary angle	-90°~ +90°
Working table size	800x180mm
Motor power	1200W
Max.distance spindle to table	400mm
Spindle taper	MT3
Spindle speed	50-3000RPM
Net weight /Cross weight	145Kg/185Kg
Packing size	920x600x1000mm



Model	DMC7020	DMC7032	DMC7040	DMC7045
Drilling capacity	20mm	32mm	40mm	45mm
Face milling capacity	63mm	63mm	80mm	80mm
End milling capacity	20mm	20mm	32mm	32mm
Distance from spindle nose to table	435mm	450mm	450mm	450mm
Min.distance from spindle axis to column	181.5mm	203.5mm	203.5mm	203.5mm
Spindle travel	85mm	130mm	130mm	130mm
Spindle taper	M.T.3 or R8	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Step of spindle speed	12	12	12	12
Range of spindle speed	50Hz 100-2200 r.p.m	80-2080 r.p.m	80-2080 r.p.m	80-2080 r.p.m
60Hz	120-2640 r.p.m	100-2500 r.p.m	100-2500 r.p.m	100-2500 r.p.m
Swivel angle of headstock (horizontally)	360°	360°	360°	360°
Table size	520×160mm	800×240mm	800×240mm	800×240mm
Forward and backward travel of table	140mm	175mm	175mm	175mm
Left and right travel of table	290mm	500mm	500mm	500mm
Motor Power	0.55KW	0.75KW	1.1KW	1.5KW
Voltage/frequency	As customer's requirement			
Net weight/gross weight	130kg/190kg	280kg/330kg	283kg/333kg	285kg/335kg
Packing size	620×750×1000mm	1020×820×1160mm	1020×820×1160mm	1020×820×1160mm
Loading amount	48pcs/20' container	28pcs/20' container	28pcs/20' container	28pcs/20' container



Model	DMC7020G	DMC7032G	DMC7040G	DMC7045G
Drilling capacity	20mm	32mm	40mm	45mm
Face milling capacity	63mm	63mm	80mm	80mm
End milling capacity	20mm	20mm	32mm	32mm
Distance from spindle nose to table	439mm	440mm	440mm	440mm
Min.distance from spindle axis to column	197.5mm	272.5mm	272.5mm	272.5mm
Spindle travel	85mm	130mm	130mm	130mm
Spindle taper	M.T.3 or R8	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Step of spindle speed	6	6	6	6
Range of spindle speed 50Hz	95-1420 r.p.m	80-1250 r.p.m	80-1250 r.p.m	80-1250 r.p.m
60Hz	115-1700 r.p.m	95-1500 r.p.m	95-1500 r.p.m	95-1500 r.p.m
Swivel angle of headstock(horizontally/perpendiculary)	360°/±90°	360°/±90°	360°/±90°	360°/±90°
Table size	520×160mm	800×240mm	800×240mm	800×240mm
Forward and backward travel of table	140mm	175mm	175mm	175mm
Left and right travel of table	290mm	500mm	500mm	500mm
Motor power	0.37KW	0.75KW(1HP)	1.1KW(1.5HP)	1.5KW(2HP)
Voltage/frequency	As customer's requirement	As customer's requirement	As customer's requirement	As customer's requirement
Net weight/gross weight	130kg/190kg	315kg/365kg	318kg/368kg	320kg/370kg
Packing size	680×750×1000mm	770×880×1160mm	770×880×1160mm	770×880×1160mm
Loading amount	48pcs/20' container	36pcs/20' container	36pcs/20' container	36pcs/20' container



Model	DMC7025FG	DMC7032FG	DMC7040FG	DMC7045FG
Max Face mill capacity	25mm	32mm	40mm	45mm
Max End mill capacity	63mm	63mm	80mm	80mm
End milling capacity	20mm	20mm	32mm	32mm
Max.distance from spindle nose to table	445mm	450mm	450mm	450mm
Min.distance from spindle axis to column	203mm	260mm	260mm	260mm
Spindle travel	85mm	130mm	130mm	130mm
Spindle taper	M.T.3 or R8	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Step of spindle speed	6	6	6	6
Range of spindle speed	50Hz	95-1420 r.p.m	80-1250 r.p.m	80-1250 r.p.m
	60Hz	115-1700 r.p.m	95-1500 r.p.m	95-1500 r.p.m
Swivel angle of headstock(perpendicularly)	90°	90°	90°	90°
Table size	520×160mm	800×240mm	800×240mm	800×240mm
Forward and backward travel of table	140mm	175mm	175mm	175mm
Left and right travel of table	290mm	500mm	500mm	500mm
Motor Power	0.37KW	0.75KW(1HP)	1.1KW(1.5HP)	1.5KW(2HP)
Voltage/frequency	As customer's requirement	As customer's requirement	As customer's requirement	As customer's requirement
Net weight/gross weight	180kg/240kg	320kg/370kg	323kg/373kg	325kg/375kg
Packing size	680×750×1000mm	770×880×1160mm	770×880×1160mm	770×880×1160mm
Loading amount	48pcs/20' container	36pcs/20' container	36pcs/20' container	36pcs/20' container



Model	DMC7032A/1	DMC7040A/1	DMC7045A/1
Drilling capacity	32mm	40mm	45mm
Max.boring diameter	50mm	60mm	70mm
Max Face mill capacity	63mm	80mm	80mm
Max End mill capacity	20mm	32mm	32mm
Max distance from spindle nose to table	400mm	400mm	400mm
Min distance from spindle axis to column	260mm	260mm	260mm
Spindle travel	130mm	130mm	130mm
Spindle taper	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Step of spindle speed	6	6	6
Range of spindle speed	50Hz	80-1250 r.p.m	80-1250 r.p.m
60Hz	95-1500 r.p.m	95-1500 r.p.m	95-1500 r.p.m
Auto-feeding step of spindle	6	6	6
Auto-feeding amount of spindle	0.06-0.30mm/r	0.06-0.30mm/r	0.06-0.30mm/r
Swivel angle of headstock (perpendicular)	±90°	±90°	±90°
Auto-feeding step of spindle(longitudinal/cross)	6	6	6
Auto-feeding amount of worktable	24,35,49,73,104,145mm/min	24,35,49,73,104,145mm/min	24,35,49,73,104,145mm/min
Table size	800×240mm	800×240mm	800×240mm
Forward and backward travel of table	165mm	165mm	165mm
Left and right travel of table	450mm	450mm	450mm
Motor Power	0.75KW(1HP)	1.1KW(1.5HP)	1.5KW(2HP)
Voltage/Frequency	As customer's requirement	As customer's requirement	As customer's requirement
Net weight/Gross weight	355kg/415kg	358kg/418kg	360kg/420kg
Packing size	930×770×1160mm	930×770×1160mm	930×770×1160mm
Loading amount	36pcs/20' container	36pcs/20' container	36pcs/20' container



Model	DMC7032FG/1	DMC7040FG/1	DMC7045FG/1
Drilling capacity	32mm	40mm	45mm
Max.boring diameter	50mm	60mm	70mm
Max Face mill capacity	63mm	80mm	80mm
Max End mill capacity	20mm	32mm	32mm
Max distance from spindle nose to table	450mm	450mm	450mm
Min distance from spindle axis to column	260mm	260mm	260mm
Spindle travel	130mm	130mm	130mm
Spindle taper	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Step of spindle speed	6	6	6
Range of spindle speed 50Hz	80-1250 r.p.m	80-1250 r.p.m	80-1250 r.p.m
60Hz	95-1500 r.p.m	95-1500 r.p.m	95-1500 r.p.m
Auto-feeding step of spindle	6	6	6
Auto-feeding amount of spindle	0.06-0.30mm/r	0.06-0.30mm/r	0.06-0.30mm/r
Swivel angle of headstock (perpendicular)	±90°	±90°	±90°
Automatically lifting of spindle (As customer's requirement)	240mm/min	240mm/min	240mm/min
Power feed attachment for table(As customer's requirement)	stepless	stepless	stepless
Table size	800×240mm	800×240mm	800×240mm
Forward and backward travel of table	175mm	175mm	175mm
Left and right travel of table	500mm	500mm	500mm
Motor Power	0.75KW(1HP)	1.1KW(1.5HP)	1.5KW(2HP)
Voltage/Frequency	As customer's requirement	As customer's requirement	As customer's requirement
Net/Gross weight	320kg/370kg	323kg/373kg	325kg/375kg
Packing size	770×880×1160mm	770×880×1160mm	770×880×1160mm




Model	DMC7032V	DMC7040V	DMC7045V
Drilling capacity	32mm	40mm	45mm
Max Face mill capacity	63mm	80mm	80mm
Max End mill capacity	20mm	32mm	32mm
Distance from spindle nose to table	400mm	400mm	400mm
Min.distance from spindle axis to column	285mm	285mm	285mm
Spindle travel	130mm	130mm	130mm
Spindle taper	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Range of spindle speed(2 steps)	100-530,530-2800r.p.m,	100-530,530-2800r.p.m,	100-530,530-2800r.p.m,
Swivel angle of headstock (perpendicular)	±90°	±90°	±90°
Table size	800x240mm	800x240mm	800x240mm
Forward and backward travel of table	175mm	175mm	175mm
Left and right travel of table	500mm	500mm	500mm
Motor power(DC)	1.1KW	1.1KW	1.5KW
Voltage/Frequency	110V or 220V	110V or 220V	110V or 220V
Net weight/Gross weight	300kg/350kg	310kg/360kg	310kg/360kg
Packing size	770x880x1160mm	770x880x1160mm	770x880x1160mm
Loading amount	36pcs/20' container	36pcs/20' container	36pcs/20' container



Model	DMC7032V/1	DMC7040V/1	DMC7045V/1
Max.drilling capacity	32mm	40mm	45mm
Max Face mill capacity	63mm	80mm	80mm
Max End mill capacity	20mm	32mm	32mm
Distance from spindle nose to table	450mm	450mm	450mm
Min.distance from spindle axis to column	260mm	260mm	260mm
Spindle travel	130mm	130mm	130mm
Spindle taper	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Range of spindle speed(2 steps)	100-530,530-2800r.p.m,	100-530,530-2800r.p.m,	100-530,530-2800r.p.m,
Auto-feeding step of spindle	6	6	6
Automatic feeding amount of spindle	0.06-0.30mm/r	0.06-0.30mm/r	0.06-0.30mm/r
Swivel angle of headstock (perpendicular)	±90°	±90°	±90°
Table size	800×240mm	800×240mm	800×240mm
Forward and backward travel of table	175mm	175mm	175mm
Left and right travel of table	500mm	500mm	500mm
Motor power(AC)	1.1KW	1.1KW	1.5KW
Voltage/Frequency	110V or 220V	110V or 220V	110V or 220V
Net weight/Gross weight	320kg/370kg	323kg/373kg	325kg/375kg
Packing size	770×880×1160mm	770×880×1160mm	770×880×1160mm
Loading amount	36pcs/20' container	36pcs/20' container	36pcs/20' container



Model	DMC7045L/1	DMC7045AFG	DMC7045AFG/1
Max Drilling capacity	45mm	45mm	45mm
Max Face mill capacity	80mm	80mm	80mm
Max End mill capacity	32mm	32mm	32mm
Max distance from spindle nose to table	530mm	425mm	425mm
Min distance from spindle axis to column	280mm	279mm	279mm
Spindle travel	130mm	130mm	130mm
Spindle taper	M.T.4	M.T.4	M.T.4
Step of speed	12	6	6
Range of spindle speed 50HZ	80-1575 r.p.m	80-1250 r.p.m	90-1600 r.p.m
2 poles motor 60HZ	160-3150 r.p.m	100-1500 r.p.m	110-1920 r.p.m
Auto-feeding step of spindle	/	6	3
Auto-feeding range of spindle	/	0.05-0.35mm/r	0.12 0.18 0.025
Swivel angle of headstock (perpendicular)	±90°	±90°	±90°
Auto-lifting for spindle (As customer's requirement)	Auto-lifting for spindle	/	/
Table size	800×240mm	800×240mm	800×240mm
Forward and backward travel of table	300mm	205mm	205mm
Left and right travel of table	585mm	585mm	585mm
Motor power	0.85/1.1KW	1.5KW	1.5KW
Voltage/Frequency	As customer's requirement	As customer's requirement	As customer's requirement
Net weight/Gross weight	380kg/450kg	380kg/420kg	330kg/380kg
Packing size	1030×920×1560mm	770×880×1160mm	770×880×1160mm
Loading amount	12pcs/20' container	36pcs/20' container	36pcs/20' container

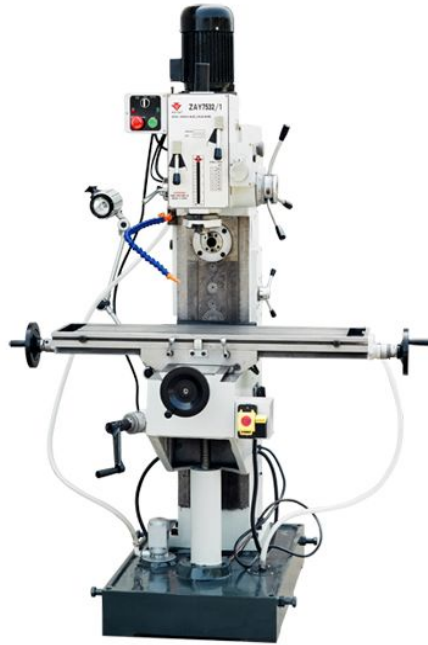

Model	DMC7532/1	DMC7540/1	DMC7545/1	DMC7550/1
Max.drilling capacity	32mm	40mm	45mm	50mm
Max.milling capacity(end/face)	25/100mm	32/100mm	32/100mm	32/100mm
Swivel angle of headstock(perpendicular)	$\pm 90^\circ$	$\pm 90^\circ$	$\pm 90^\circ$	$\pm 90^\circ$
spindle taper(end/face)	M.T.3 M.T.4	M.T.4	M.T.4	M.T.4
Distance from spindle nose to worktable surface	80-480mm	80-480mm	80-480mm	80-480mm
spindle travel	130mm	130mm	130mm	130mm
beam travel	500mm	500mm	500mm	500mm
step of spindle speed(end/face)	6\12	6\12	6\12	6\12
Range of spindle speed(end/face) 50HZ	90-1600 /38-1280 (r/min)	90-1600 /38-1280 (r/min)	90-1600 /38-1280 (r/min)	90-1600 /38-1280 (r/min)
60HZ (4 poles)	110-1920 /45-1540 (r/min)	110-1920 /45-1540 (r/min)	110-1920 /45-1540 (r/min)	110-1920 /45-1540 (r/min)
Step of spindle auto-feeding(end/face)	3	3	3	3
Range of spindle auto-feeding(end/face)	0.12 0.18 0.25	0.12 0.18 0.25	0.12 0.18 0.25	0.12 0.18 0.25
Worktable size	800×240mm	800×240mm	800×240mm	1000×240mm
Forward and afterward travel of worktable	300mm	300mm	300mm	300mm
Left anf right travel of worktable	585mm	585mm	585mm	785mm
Vertical travel of worktable	400mm	400mm	400mm	400mm
Min.distance from spindle axis to column	290mm	290mm	290mm	290mm
Power(end/face)	0.75KW(1HP)/1.5KW	1.1KW(1.5HP)/1.5KW	1.5KW(2HP)/1.5KW	1.5KW(2HP)/1.5KW
Voltage/Frequency	As customer's requirement	As customer's requirement	As customer's requirement	As customer's requirement
Cooling pump power	0.04KW	0.04KW	0.04KW	0.04KW
Net weight/Gross weight	930kg/1030kg	933kg/1033kg	935kg/1035kg	950kg/1050kg
Packing size	1020×1350×1850mm	1020×1350×1850mm	1020×1350×1850mm	1220×1350×1850mm
Loading amount	8pcs/20' container	8pcs/20' container	8pcs/20' container	4pcs/20' container



Model	DMC7532	DMC7540	DMC7545	DMC7550
Max.drilling capacity	32mm	40mm	45mm	50mm
Max.milling capacity (end / face)	25/100mm	32/100mm	32/100mm	32/100mm
Swivel angle of headstock(perpendicular)	±90°	±90°	±90°	±90°
spindle taper(end/face)	M.T.3 M.T.4	M.T.4	M.T.4	M.T.4
Distance from spindle nose to worktable surface	80-480mm	80-480mm	80-480mm	80-480mm
spindle travel	130mm	130mm	130mm	130mm
Beam travel	500mm	500mm	500mm	500mm
step of spindle speed(end/face)	6\12	6\12	6\12	6\12
range of spindle speed(end/face) 50Hz	80-1250 /38-1280 (r/min)	80-1250 /38-1280 (r/min)	80-1250 /38-1280 (r/min)	80-1250 /38-1280 (r/min)
60Hz (4 Poles)	95-1500 /45-1540 (r/min)	95-1500 /45-1540 (r/min)	95-1500 /45-1540 (r/min)	95-1500 /45-1540 (r/min)
Worktable size	800×240mm	800×240mm	800×240mm	1000×240mm
Forward and afterward travel of worktable	300mm	300mm	300mm	300mm
Left and right travel of worktable	585mm	585mm	585mm	785mm
Vertical travel of worktable	400mm	400mm	400mm	400mm
Min.distance from spindle axis to column	290mm	290mm	290mm	290mm
Power(end/face)	0.75KW(1HP)/1.5KW	1.1KW(1.5HP)/1.5KW	1.5KW(2HP)/1.5KW	1.5KW(2HP)/1.5KW
Voltage/Frequency	As customer's requirement	As customer's requirement	As customer's requirement	As customer's requirement
Cooling pump power	0.04KW	0.04KW	0.04KW	0.04KW
Net weight/Gross weight	910kg/1010kg	913kg/1013kg	915kg/1015kg	930kg/1030kg
Packing size	1020×1350×1850mm	1020×1350×1850mm	1020×1350×1850mm	1220×1350×1850mm
Loading amount	8pcs/20' container	8pcs/20' container	8pcs/20' container	4pcs/20' container