




M2010

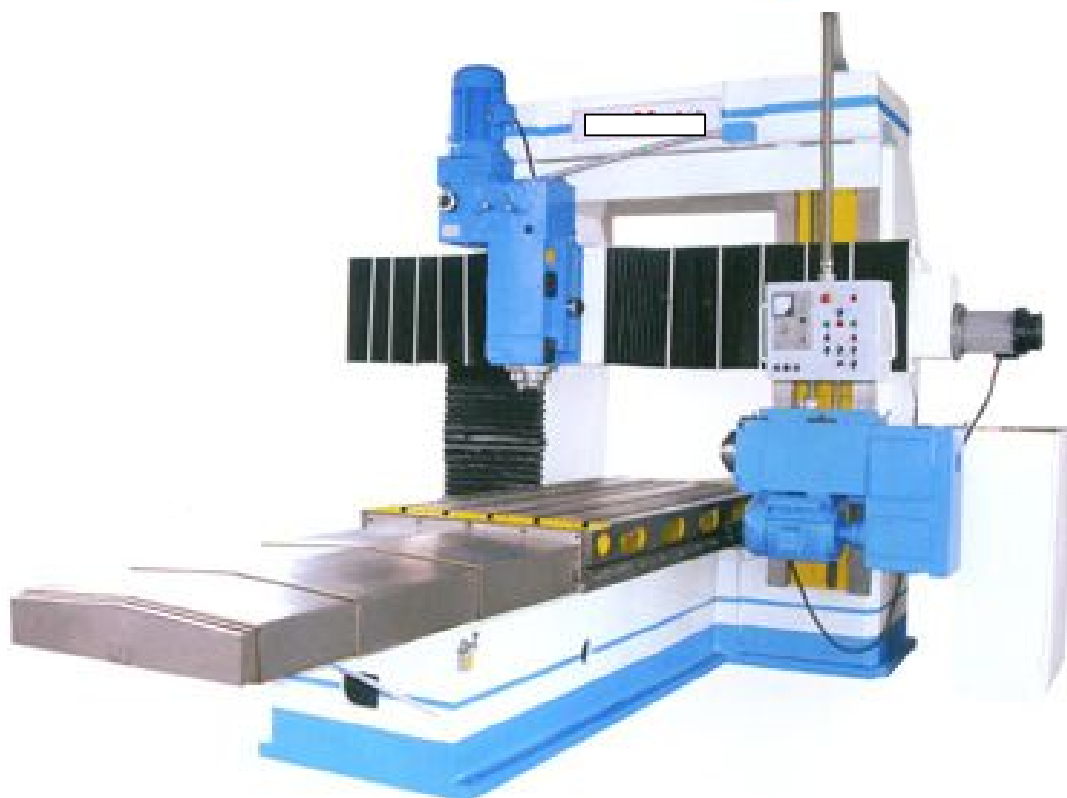

M2010

| | | | |
|-------------------------------|--------------|------------------------------------|----------------|
| Max size(height x width) | 1000X600 | Front gear diameter of spindle | 85 |
| Distance spindle end to table | 80~700 | Spindle speed steps | 6 |
| Distance between columns | 1030 | Spindle speed range | 95~550 |
| Table size | 1800x700 | Crossbeam elevating speed | 200 |
| Longitudinal travel | 1700 or 2000 | Spindle motor power | 5.5 |
| Table feed steps | 6 | Motor power for feeding system | 2.2 |
| Feed range | 55~290 | Motor power for crossbeam elevator | 1.5 |
| Quick move speed of table | 1338 | Overall size of cathe | 3900X2350X2255 |
| Spindle bore | 7: 21 50 | Weight(appv) | 7000 |